

Jet2-A, Jet6-A, Jet8-A

Air Knife Spot Dryer



Overview

Compact washdown blower housing with an integrated high-speed jet blower. Direct flow of air from the blower outlet to the target surface eliminates plumbing efficiency losses, simplifies maintenance and accelerates installation.

Jet2-A, Jet6-A and Jet8-A use one, three or four shrouded air knives in line on the housing. Each air knife has a 75 mm / 3 in adjustable slot outlet that creates a uniform curtain of high-velocity air across trays, cartons and flat packaging faces — ideal when you need a wide, even dry zone without compressed air.

Mounting options include a floor tripod, a Ø30 mm or twin Ø12 mm tube conveyor sidewall brackets, M8 connections in the end caps and M6 taps on the housing. That flexibility, together with adjustable knife aim, lets the Jet-A series target hard-to-reach problem areas on sensors, parts, pouches and more.



IDEAL FOR

Trays, Cartons, Flat Surfaces



INDUSTRIES

CPG, Pharma



COMPRESSED AIR REPLACEMENT

94% kW Savings, Plug-n-Play



IMPROVE QUALITY

Enhance Drying, Stop False Rejects, Improve Up-time



SMART


Safety, Low Maint., Smallest Footprint

Technical specifications


Parameter	Jet2-A	Jet6-A	Jet8-A
Air knife architecture		Adjustable shrouded slot 75 mm / 3 in	
Air knives	1	3	4
Rated voltage		24 VDC	
Rated current	22 A	66 A	88 A
Power consumption	528 W	1 584 W	2 112 W
Optional input	230 VAC 2.6 A	230 VAC 7.8 A	230 VAC 10.4 A
Max. air pressure		25 kPa	
Max. air flow	1 500 L/min	4 500 L/min	6 000 L/min
Life / sound / temp.		25 000 h · 72 dBA · -20 °C to +50 °C	
Electrical enclosure type/size	ABS 20×12×12 cm / SS 30×25×15 cm	SS 40×40×20 cm	SS 60×40×20 cm
Mounting options	Tripod / Ø30 mm tube conveyor sidewall bracket / Ø12 mm tube conveyor sidewall bracket pair		
Origin / standards / warranty	Germany / UL 508A, IEC 60204-1 / Wash-down / 3 years extended		

Dimensions


Jet2-A

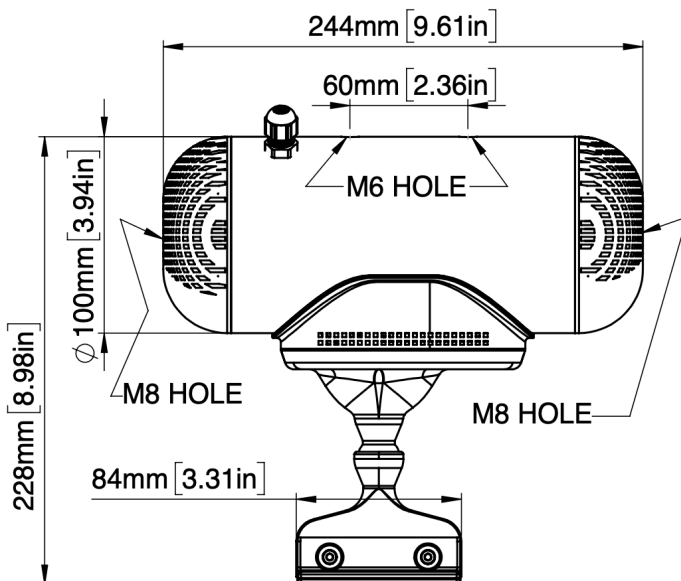

Jet6-A

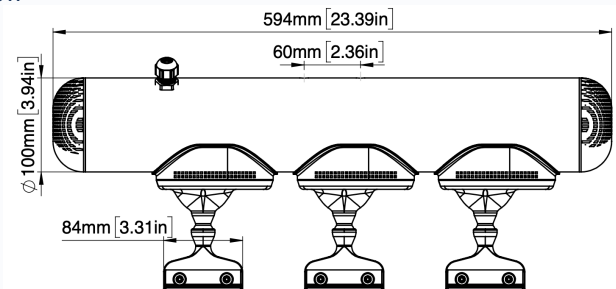

Jet8-A

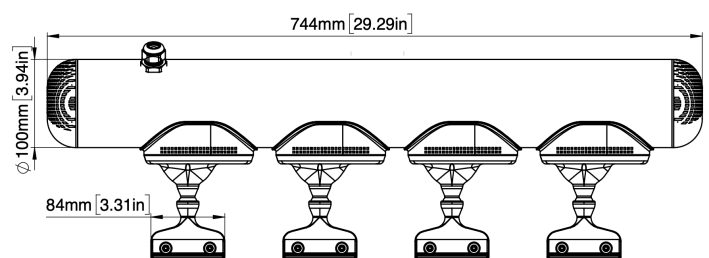

Jetdry Technologies UG (haftungsbeschränkt)

www.jetdry.tech · sales@jetdry.tech



+49 30 21927787



+1 805 219 6632

