

Jet2-W, Jet6-W, Jet8-W

Wire/Extrusion Spot Drying



Overview

Compact washdown blower housing with an integrated high-speed jet blower. Direct flow of air from the blower outlet to the target surface eliminates plumbing efficiency losses, simplifies maintenance and accelerates installation.

Jet2-W, Jet6-W and Jet8-W use four, twelve and sixteen Ø6 mm / Ø0.25 in adjustable nozzles oriented inside a ring to deliver full 360° blow-off coverage on wire, cable and extrusions — so moisture and process residue are cleared before coiling, printing or downstream handling. The open-ring design speeds installation and start-up: product does not have to be threaded through the dryer.

Mounting options include a floor tripod, a Ø30 mm or twin Ø12 mm tube conveyor sidewall brackets, M8 connections in the end caps and M6 taps on the housing.



IDEAL FOR
Wire, Cable, Extrusions



INDUSTRIES
Wire, Cable & Extrusions



COMPRESSED AIR REPLACEMENT
94% kW Savings, Plug-n-Play



IMPROVE QUALITY
Enhance Drying, Stop False Rejects, Improve Up-time




SMART
Safety, Low Maint., Smallest Footprint

Technical specifications


Parameter	Jet2-W	Jet6-W	Jet8-W
Arm architecture	Open ring with 4x Ø6 mm / Ø0.25 in nozzles around 50 mm / 2 in target space		
Wrap arms	4	12	16
Rated voltage		24 VDC	
Rated current	22 A	66 A	88 A
Power consumption	528 W	1 584 W	2 112 W
Optional input	230 VAC 2.6 A	230 VAC 7.8 A	230 VAC 10.4 A
Max. air pressure		25 kPa	
Max. air flow	1 500 L/min	4 500 L/min	6 000 L/min
Life / sound / temp.		25 000 h · 72 dBA · -20 °C to +50 °C	
Electrical enclosure type/size	ABS 20×12×12 cm / SS 30×25×15 cm	SS 40×40×20 cm	SS 60×40×20 cm
Mounting options	Tripod / Ø30 mm tube conveyor sidewall bracket / Ø12 mm tube conveyor sidewall bracket pair		
Origin / standards / warranty	Germany / UL 508A, IEC 60204-1 / Wash-down / 3 years extended		

Dimensions


Jet2-W

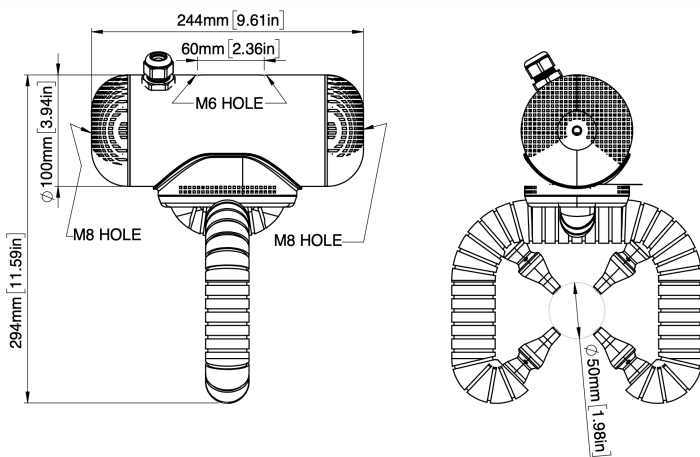

Jet6-W

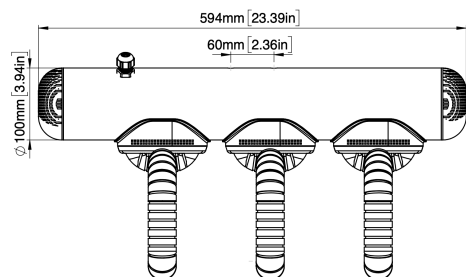

Jet8-W

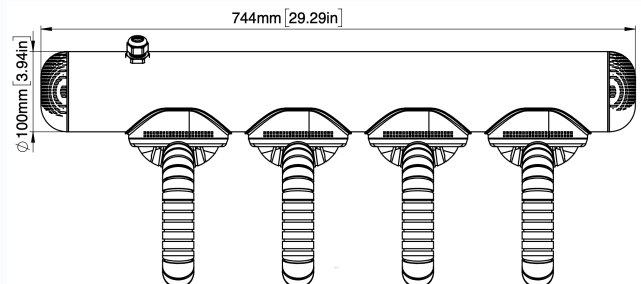

Jetdry Technologies UG (haftungsbeschränkt)

www.jetdry.tech · sales@jetdry.tech



+49 30 21927787



+1 805 219 6632

